

Vorteile – Druckminderer DM 586

seit 1885
MANKENBERG

Special Feature

Balanced Cone
Vordruckunabhängige
Hinterdruckregelung

CrNiMo stainless steel (316)
deep-drawn, corrosion-
resistant, lightweight and
compact

Long operational lifespan,
manageable installation

1

Various connection
possibilities: aseptic flanges,
clamp connections, DIN or
ANSI flanges, welding ends ...

No adapters or fitting
pieces required

2

Body with excellent surface
quality

Easy to clean

3


Mankenberg clamp system

Easy maintenance

4

Many control modules
available

Very precise regulation

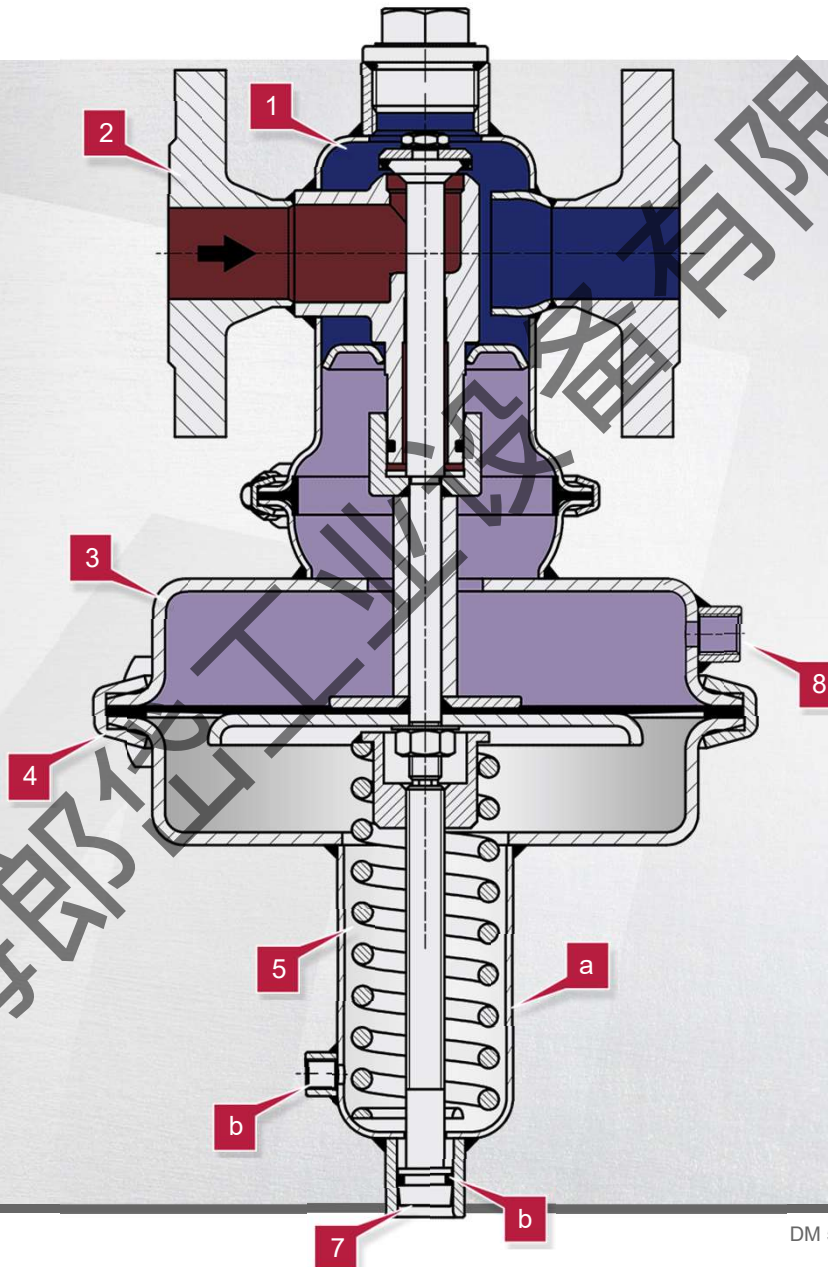

EASY-CHECK –
non-rising adjusting screw

Function externally visible,
easy and accurate to
adjust the set pressure, non-
varying installation height

7

Control line connection

High control accuracy

8

Options

Dome-loaded

Electro-pneumatic actuation

a

Leakage line connection and
adjusting screw seal

Usable BGV-compliant for
combustible and
dangerous media

b

Inlet Pressure

Outlet Pressure

Control Pressure