

# Benefits – Pressure Reducing Valve DM 762

seit 1885  
**MANKENBERG**

CrNiMo steel (316L), deep-drawn, corrosion-resistant, lightweight and compact

Long operational lifespan, manageable installation, minimum space required, low delta-ferrite content possible

1

Large control surface, fully developed lever mechanism


Exact control and tight valve closure also at low pressures

2

Body with excellent surface quality

Easy to clean

3

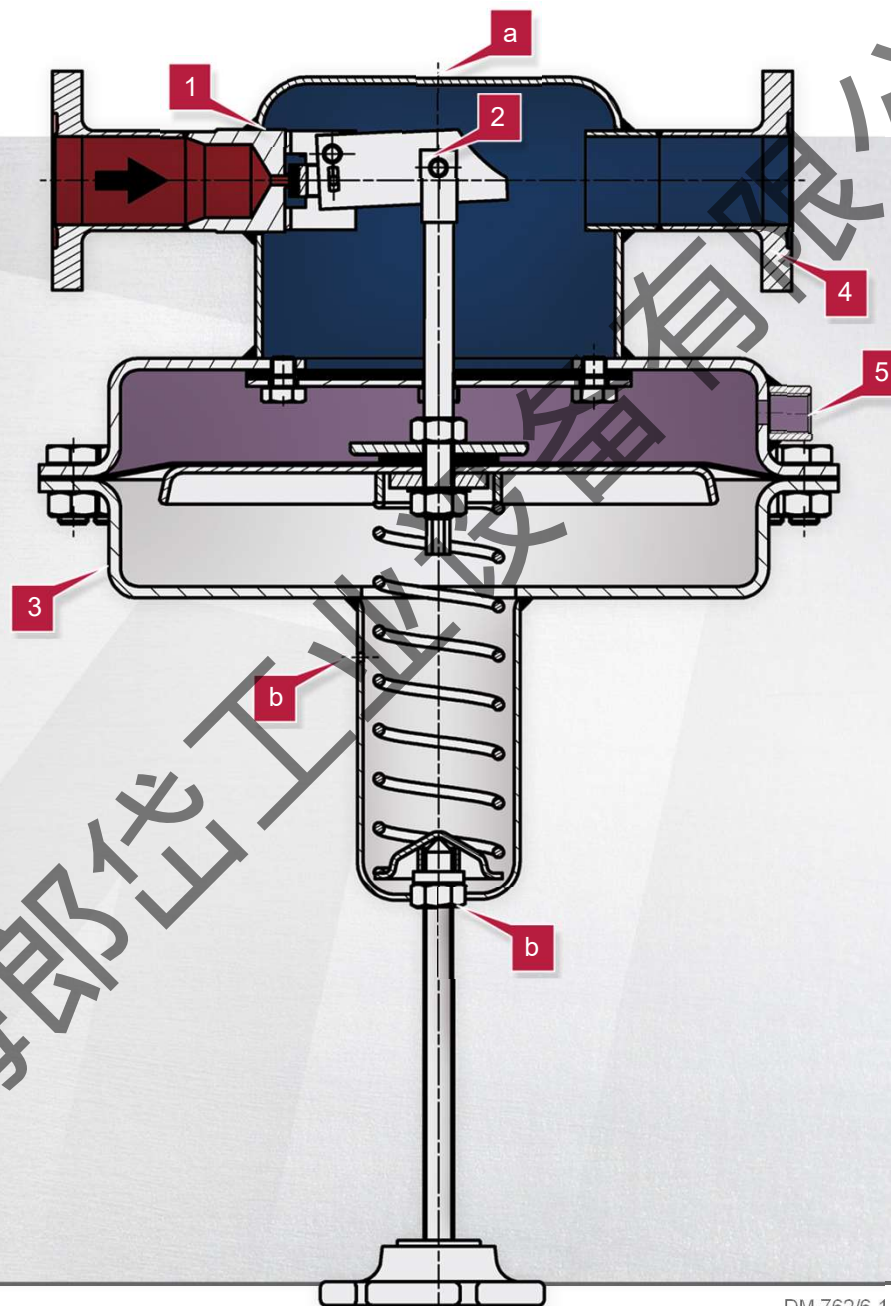

Various connection possibilities: aseptic flanges, clamp connections, DIN or ANSI flanges, welding ends ...

No adapters or fitting pieces required

4

Control line connection

Minor control deviation

5

## Optionen

Manometer connection

a

Leakage line connection and adjusting screw seal

Usable BGV-compliant for combustible and dangerous media

b

Inlet Pressure

Outlet Pressure

Control Pressure